




**Angleway
check valves
W series**

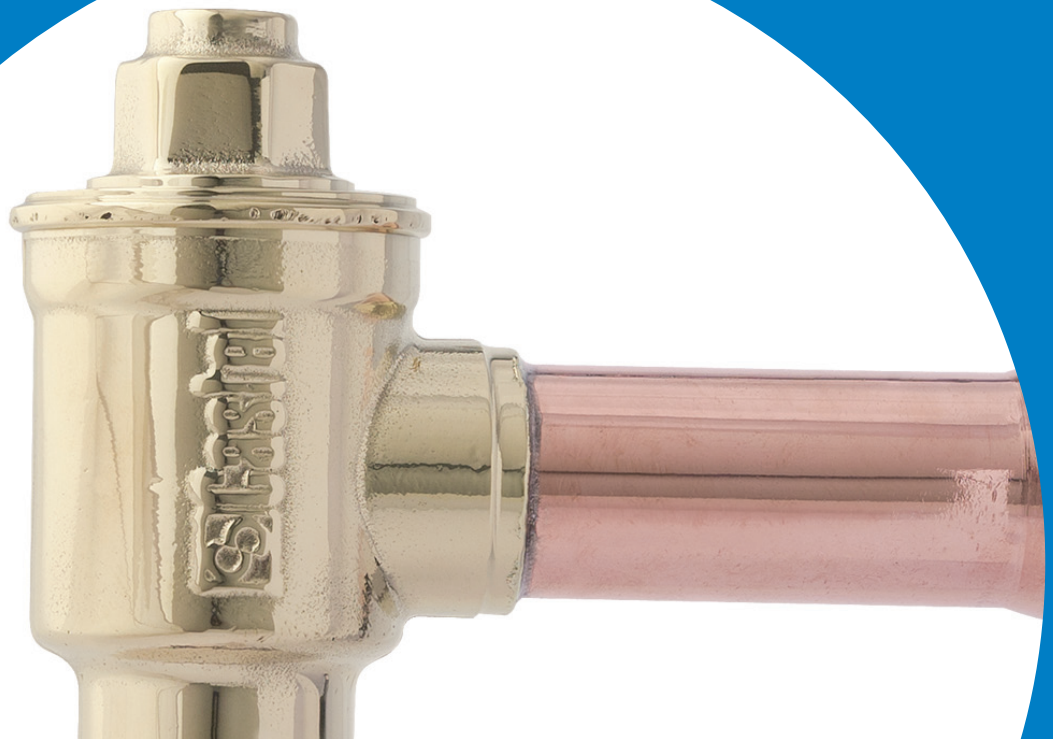

Check valves - R22/HFC/HFO/HC/R744

NEW Part Number	L [mm]	L1 [mm]	H [mm]	H1 [mm]	Q [mm]	Kv m3/h	Part Number	L [mm]	L1 [mm]	H [mm]	H1 [mm]	Q [mm]	Kv m3/h
3184W/7	110	86	149	92	49	9	3182/7	130,5	100,5	151	95	60	6,6
							3184N/7	110	86	149	92	49	9
							3184UL/7	130,5	100,5	151	95	60	8,8
3184W/9	148,5	121	201	139	57	19	3182/9	130,5	100,5	151	95	60	8,8
							3184N/9	148,5	121	201	139	57	19
							3184UL/9	130,5	100,5	151	95	60	8,8
3184W/M28	148,5	121	201	139	57	19	3182/M28	130,5	100,5	151	95	60	8,8
							3184N/M28	148,5	121	201	139	57	19
							3184UL/M28	150	116	177	109,5	68	15,2
(1) 3184W/11	151	121	207	139	60	29	3182/11	151	121	207	139	60	29
							3184N/11	130,5	100,5	151	95	60	6,6
							3184UL/11	110	86	149	92	49	9
3185W/7	110	86	149	92	49	9	3183/7	130,5	100,5	151	95	60	6,6
							3185N/7	110	86	149	92	49	9
							3185UL/7	130,5	100,5	151	95	60	8,8
3185W/9	148,5	121	201	139	57	19	3183/9	130,5	100,5	151	95	60	8,8
							3185N/9	148,5	121	201	139	57	19
							3185UL/9	130,5	100,5	151	95	60	8,8
3185W/M28	148,5	121	201	139	57	19	3183/M28	130,5	100,5	151	95	60	8,8
							3185N/M28	148,5	121	201	139	57	19
							3185UL/M28	150	116	177	109,5	68	15,2
(1) 3185W/11	151	121	207	139	60	29	3183/11	151	121	207	139	60	29
							3185N/11	130,5	100,5	151	95	60	6,6
							3185UL/11	110	86	149	92	49	9


(1) no use with HC

- Angleway hermetic check valves 3184W standard spring 0,04 bar-copper connections
- Angleway hermetic check valves 3185W reinforced spring 0,3 bar - copper connections for discharge line


✓ Range Temperature -40 C° + 150 C°

✓ Work Pressure 45bar

✓ Refrigerants HFC, HCFC, HFO, HC and CO₂



3184W/..
3185W/..



3182/..
3183/..

REPLACE


Check valves - R744

NEW Part Number	L [mm]	L1 [mm]	H [mm]	H1 [mm]	Q [mm]	Kv m3/h	Part Number	L [mm]	L1 [mm]	H [mm]	H1 [mm]	Q [mm]	Kv m3/h
3185EW/7	110	86	149	92	49	9	3185EL/7	110	86	149	92	49	9
							3185E/7	148,5	121	201	139	57	19
							3185E/9	148,5	121	201	139	57	19
3185EW/M28	148,5	121	201	139	57	19	3185EL/M28	148,5	121	201	139	57	19
							3185E/M28	151	121	207	139	60	29
							3185E/11	110	86	149	92	49	9
3187EW/11	151	121	207	139	57	19	3187E/11	151	121	207	139	57	19
3188EW/M22	110	86	149	92	49	9	3188E/M22	110	86	149	92	49	9
3188EW/M28	148,5	121	201	139	57	19	3188E/M28	148,5	121	201	139	57	19
3188EW/M35	151	121	207	139	57	19	3188E/M35	151	121	207	139	57	19

- Angleway hermetic check valves 3185EW reinforced spring 0,3 bar - copper connections - Ps 80 bar
- Angleway hermetic check valves 3187EW reinforced spring 0,3 bar - copper connections K65 - Ps 120 bar
- Angleway hermetic check valves 3188EW reinforced spring 0,3 bar - stainless steel connections - Ps 140 bar

✓ Range Temperature -40 C° + 150 C°

✓ Refrigerant CO₂



3185EW/..
3187EW/..
3188EW/..

3185EL/..
3185E/..
3187E/..
3188E/..

REPLACE